

**BİLGİLER**

## 55" 4K UHD professional digital signage display with advanced control and connectivity options



Elevate your visual communication with the LH5560UHS-B1AG and unlock the new possibilities for your business. This 500cd/m<sup>2</sup> high brightness display is a powerful business tool that takes your marketing and communication efforts to the next level. With its Android 11 OS, [iiSignage<sup>2</sup>](#) content management software, Signal FailOver and [EShare](#) features, this display offers a straightforward user experience, making content creation, management, and sharing a breeze.

This ELED VA display consumes significantly less power compared to DLED IPS while maintaining the same level of brightness. Its versatile orientation, sleek design, and 24/7 reliability ensure it seamlessly integrates into any business environment. Whether it's used in retail, corporate, hospitality, or educational settings, the LH5560UHS -B1AG will undoubtedly captivate your audience and leave a lasting impression.



### Android OS

Android işletim sistemi sayesinde, ekranı ihtiyaçlarınıza göre kolayca özelleştirebilirsiniz, doğrudan uygulamaları yükleyerek.




### Signal FailOver

FailOver, giriş kaynaklarını otomatik olarak algılayan bir özelliktir. Varsayılan girişte sinyal olmadığında, otomatik olarak bir sonraki kullanılabilir girişe geçecektir. FailOver, müşterilerin bir dizi girdiye (Tarayıcı, Medya Oynatıcı ve Özel dahil) öncelik vermesine olanak tanır ve içeriğinizin her zaman aktif olarak görüntülenmesini sağlayarak her zaman aktif içeriği garanti eder.

### 4 SIMPLE STEPS

TO REACH YOUR AUDIENCE

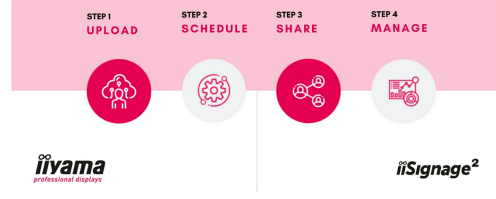

### iiSignage²



### Ultra İnce

Benzer modellere göre yüzde 50 derinlik tasarrufu sağlayan, dudak uçuklatan ve sınıfının en iyisi 40 mm toplam derinlik göstergesi, tüm alanlara gizli ve zarif bir şekilde kurulabilir.

## ÖZELLİKLER

### 01 EKCRAN ÖZELLİKLERİ

Ekran Boyutu	54.6", 139cm
Diyagonal	139cm
Panel	VA, AG coated glass, mat kaplama, hard coating (3H), haze 25%
Çözünürlük	3840 x 2160 @60Hz (8.3 MegaPixels 4K UHD)
En-Boy Oranı	16:9
Panel Parlaklığı	500 cd/m <sup>2</sup>
Statik Kontrast	4000:1
Tepki süresi (GTG)	6.5ms
Görüntüleme Alanı	yatay/dikey: 178°/178°, sağ/sol: 89°/89°, yukarı/aşağı: 89°/89°
Renk desteği	(NTSC 87%)
Yatay Sync	28 - 160kHz
Görüntülenebilir alan G x Y	1209.6 x 680.4mm, 47.6 x 28.8"
Çerçeve genişliği (yanlar, üst, alt)	13.3mm, 13.3mm, 15.3mm
Piksel Aralığı	0.315mm

### 02 ARAYÜZLER / BAĞLANTILAR / KONTROLLER

Dijital sinyal girişi	HDMI x3 (v.2.0, max. 3840x2160 @60Hz)
Monitör kontrol girişi	RS-232c x1 RJ45 (LAN) x1
Ses çıkışı	Mini jack x1 (3.5mm) Hoparlör 2 x 10W
HDCP	v.1.4 & 2.2
USB Portları	x2 (v.2.0)

### 03 ÖZELLİKLER

Dahili OS	Android 11 OS, iiSignage <sup>2</sup> , FailOver, EShare
WiFi	(Built-in, 802.11ac)
NFC/RIFID	CPU: A53*4, GPU: G52 MP2, RAM: 2GB, ROM: 16GB
Ekstra	Wall mounting kit included (VESA 300x400mm)
Anti görüntü koruma	evet
Media playback	evet

### 04 GENEL

OSD dilleri	, , , , , , , , , SV, FI, DA, NB
Kontrol Düğmeleri	Power button, Power Indicator, Remote Sensor

**Kullanıcı kontrolleri** picture (brightness, contrast, sharpness, black level, tint, colour, noise reduction, gamma selection, colour temperature, colour control, over scan, picture reset), screen (zoom mode, custom zoom, screen reset), Audio (balance, treble, bass, volume, audio out, maximum volume, minimum volume, mute, audio out sync, speaker setting, audio reset), configuration 1 (switch on state, panel saving, RS232-routing, boot on source, WOL, configuration 1 reset, factory reset), Configuration 2 (OSD timeout, OSD H-Position, OSD V-position, system rotation, information OSD, logo and animation logo setting, animation setting, monitor ID, monitor information, HDMI version, configuration 2 reset), advanced option (IR control, off timer, schedule, HDMI with one wire, HDMI with one wire power off, FailOver, language, OSD transparency, power saving, advanced option reset), Android settings (network & internet, apps & notifications, display, signage display, security, language & input, date & time, about device)

## 05 MEKANİK

<b>Fansız tasarım</b>	evet
<b>VESA montajı</b>	300 x 400mm
<b>Çalışma sıcaklığı aralığı</b>	0°C - 40°C
<b>Depolama sıcaklığı aralığı</b>	- 20°C - 60°C
<b>MTBF</b>	50.000 saat (arka ışık hariç)

## 06 PAKET İÇERİĞİNDEKİ AKSESUARLAR

<b>Kablolar</b>	güç, HDMI, RS-232c
<b>Diğer</b>	Wall mount bracket, Wall mount guide, Screws, Screw anchors, Stickers for screw holes

## 07 GÜÇ YÖNETİMİ



<b>Güç Kaynağı</b>	AC 100 - 240V, 50/60Hz
<b>Güç Tüketimi</b>	89W tipik, 0.5W stand by, 0.3W off mode

## 08 ÖLÇÜLER / AĞIRLIK

<b>Ürün boyutları G x Y x D</b>	1239.7 x 712.5 x 38.6mm
<b>Kutu boyutları G x Y x D</b>	1390 x 850 x 136mm
<b>Ağırlık (kutu hariç)</b>	17.6kg
<b>Ağırlık (kutu ile birlikte)</b>	22.9kg
<b>EAN kodu</b>	4948570122301

## 09 İLGİLİ BİLGİ

**İlgili ürünler** [ProLite LH3260HS-B1AG](#), [ProLite LH4360UHS-B1AG](#), [ProLite LH6560UHS-B1AG](#), [ProLite LH5060UHS-B1AG](#)

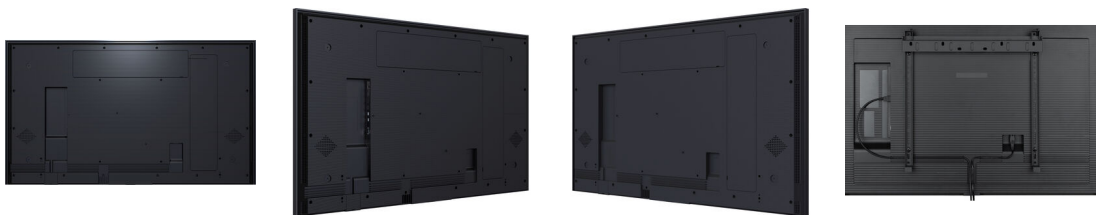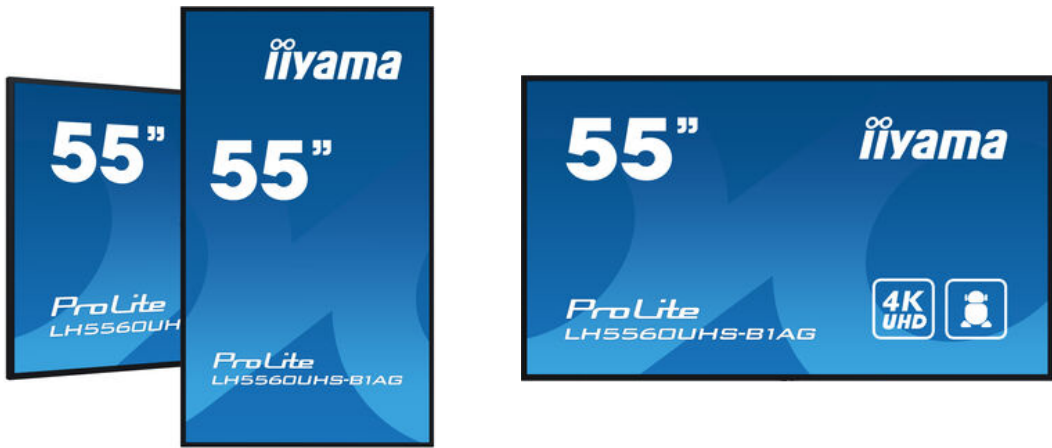



All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © IYAMA CORPORATION. ALL RIGHTS RESERVED