

50" Vivid-Bright Display with 4K resolution and 800cd/m² panels for illuminating communication

Create dynamic, show stopping content, designed to entice and captivate your audience. The LH5065UHSB vivid-bright display, boasting 800cd/m², can be operated in landscape or portrait orientation in continual around the clock environments 24/7 without any interruption. Its versatility can be adapted to your industry's display needs. On-board Android 11 OS means you can easily customize the display to your needs and smoothly run third party applications, including multiple CMS platforms.

The on-board [iiSignage²](#) (Content Management System) gives you total control of your messaging and advertising remotely and safely. The Signal FailOver feature ensures your content is always actively displayed through your choice of inputs for mission critical environments. The built-in (and removable) WiFi module means this series is ready for remote content delivery using your network.

With the [EShare app](#) you bring effortless ideation and efficient collaboration in your enterprise or school. You can start sharing wireless easier than ever before.

Android OS

Thanks to Android OS, you can easily customize the display to your needs by installing applications directly to it.

iiSignage²

iiSignage² is our digital signage content management platform to easily show and control your content and to manage your displays in a secure way. The Content Management System (CMS) gives you total control of your messaging and advertising remotely and safely.

Signal FailOver

FailOver is a feature which automatically detects input sources. When there is no signal on the default input it will automatically switch to the next available input. FailOver allows customers to prioritize a number of inputs (incl. Browser, Media Player and Custom) and ensures your content is always actively displayed, assuring active content at all times.

VIVID-BRIGHT DISPLAYS

Designed for maximum exposure, these 800cd/m² vivid-bright displays will illuminate your communication. Entice and captivate your audience with dynamic, show stopping content.

SPECIFIKÁCIÓ

01 KIJELZŐ JELLEMZŐI

Dizájn	Vékony káva
Átló	49.5", 125.7cm
Panel	VA, matte finish, haze 25%
Natív felbontás	3840 x 2160 @60Hz (8.3 MegaPixels 4K UHD)
Képarány	16:9
Fényerő	800 cd/m ²
Statikus kontraszt	5000:1
Válaszidő (GTG)	9.5ms
Látótér	horizontális/vertikális: 178°/178°, jobb/bal: 89°/89°, fel/le: 89°/89°
Szín támogatás	1.07G (8 Bits+FRC) (NTSC 72%)
Horizontális szinkronizálás	28 - 160kHz
Látható terület Sz x M	1096 x 616.5mm, 43.1 x 24.3"
Káva szélessége (oldal, felső, alsó)	13.25mm, 13.5mm, 13.5mm
Pixel magasság	0.285mm
Káva színe és felülete	fekete, matt

02 INTERFÉSZEK / CSATLAKOZÓK / VEZÉRLŐK

Digitális jelműnyet	HDMI x2 (v.2.0, max. 3840x2160 @60Hz) DisplayPort x1 (v.1.2, max. 3840x2160 @60Hz)
Monitor vezérlő bemenet	RS-232c x1 (2.5mm sub-mini jack) RJ45 (LAN) x1
Audio kimenet	Mini jack x1 (3.5mm - stereo) Hangszórók 2 x 10W
HDCP	v.2.2
USB portok	x2 (v.2.0)

03 JELLEMZŐK

Beépített szoftver	Android 11 OS, iiSignage2, FailOver, EShare
WiFi	igen (Built-in, 802.11ac)
Hardver	CPU: A73*4+A53*4, GPU: G52 MP8, RAM: 4GB, ROM: 32GB
Max. non-stop üzemidő	24/7
Média lejátszás	igen
Ház (káva)	fém

04 ÁLTALÁNOS

Képernyőn megjelenő nyelvek	EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL, SV, FI, DA, NB
-----------------------------	--

Vezérlógombok	Power
Felhasználói vezérlők	picture (brightness, contrast, sharpness, black level, tint, colour, noise reduction, gamma selection, colour temperature, colour control, over scan, picture reset), screen (H. position, V. position, clock, clock phase, zoom mode, custom zoom, auto adjust, screen reset), Audio (balance, treble, bass, volume, audio out, maximum volume, minimum volume, mute, audio source, audio reset, audio out sync, speaker setting), configuration 1 (switch on state, panel saving, RS232-routing, boot on source, WOL, configuration 1 reset, factory reset), Configuration 2 (OSD timeout, OSD H-Position, OSD V-position, rotation, information OSD, logo and animation logo setting, animation setting, monitor ID, group ID, monitor information, DP version, DP monitors, HDMI version, configuration 2 reset), advanced option (IR control, power LED light, keyboard control, tiling, off timer, schedule, HDMI with one wire, HDMI with one wire power off, FailOver, language, OSD transparency, power saving, SDM settings, advanced option reset), Android settings (network & internet, apps & notifications, display, signage display, security, language & input, date & time, about device)
Plug&Play	DDC2B

05 MECHANIKUS

Tájolás	tájkép, portré
Ventilátor nélküli kialakítás	igen
VESA állvány	400 x 400mm
Működési hőmérséklet tartomány	0°C - 40°C
Tárolási hőmérséklet tartomány	- 20°C - 60°C
MTBF	50.000 óra (kivéve háttérvilágítás)

06 TARTOZÉKOKAT TARTALMAZZA

Kábelek	áramellátás, HDMI, RS-232c
Útmutatók	gyors üzembe helyezési útmutató, biztonsági útmutató
Egyéb	Stickers for screw holes, wire buckles
Távírányító	igen (elemeket tartalmazza)

07 ENERGIAGAZDÁLKODÁS

Tápegység	belső
Áramellátás	AC 100 - 240V, 50/60Hz
Energiafogyasztás	65W jellemző, 0.5W készenlét, 0.3W kikapcsolva
Áramfogyasztás	0.5W készenlét

08 FENNTARTHATÓSÁG

Előírások	CE, TÜV-Bauart, RoHS támogatás, ErP, WEEE, HATÓTÁVOLSÁG, UKCA
Energiahatékonysági osztály ((EU) 2017/1369 rendelet)	E

09 MÉRETEK / SÚLY

Termék méretei Sz x H x M	1127.6 x 643.5 x 55mm
Doboz méretei Sz x H x M	1370 x 850 x 156mm
Súly (doboz nélkül)	11.3kg
Súly (dobozsal)	14.85kg
EAN kód	4948570123568

10 EU ENERGIAHATÉKONYSÁGI CIMKE

Energy efficiency class (Regulation (EU) 2017/1369)	E
Látható képernyő átlója	125.7cm; 50"; (50" szegmens)
Energiafogyasztás bekapcsolva (ON)	65W
OFF mód bekapcsolása	0.3W off mód

11 KAPCSOLÓDÓ INFORMÁCIÓK

Kapcsolódó termékek [ProLite LH4365UHSB-B1](#), [ProLite LH5565UHSB-B1](#), [ProLite LH7565UHSB-B1](#), [ProLite LH8665UHSB-B1](#), [ProLite LH6565UHSB-B1](#)

LH5065UHSB-B1AG(10).jpg


LH5065UHSB-B1AG(20).jpg

LH5065UHSB-B1AG(21).jpg

LH5065UHSB-B1AG(30).jpg

LH5065UHSB-B1AG(12)1.jpg

LH5065UHSB-B1AG(11).jpg

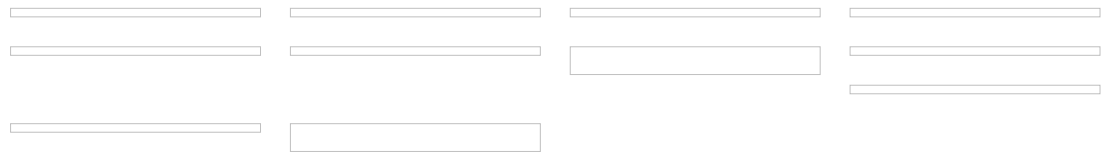

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects. © IYAMA CORPORATION. ALL RIGHTS RESERVED