




27" WQHD monitor providing extra workspace and flexibility

Looking at a screen for long hours can be quite tiring for the eyes. But it doesn't have to. The new 27" iiyama ProLite B2791QSU is big enough to make sure you can clearly see every detail and it comes equipped with technologies to help keep your vision intact. The B2791QSU offers WQHD (2560 x 1440) resolution meaning the screen can accommodate almost 77% more information than a Full HD display. E-mail and excel will fit in nicely next to each other. The panel backlight is flicker free and the blue light reducer function limits the amount of blue, the most unfavorable, light emitted by the screen. The height adjustable stand allows you to easily adjust the screen position to make sure you are looking at it at the right angle. DVI, HDMI and DisplayPort inputs along with a USB hub assure broad connectivity options. And as the monitor offers 1ms response time and supports FreeSync technology, it can serve not only as your workplace companion, but also to play games and watch movies.



QHD

With true QHD 2560 x 1440p resolution your monitor is ready to display high definition images. This means you can accommodate more information on your screen, i.e. over 76% more in comparison to a 1920 x 1080 monitor.



HAS + Pivot

With a height adjustable stand you will create an ergonomic work posture and position that meets all health and safety requirements. This will not only prevent any health issues but will also increase your productivity. The pivot function allows the screen to rotate from landscape to portrait orientation. This functionality can be useful if the application requires more height than width.

01 DISPLAY CHARACTERISTICS

Diagonal	27", 68.5cm
Panel	TN LED, matte finish
Native resolution	2560 x 1440 (3.7 megapixel WQHD)
Aspect ratio	16:9
Panel brightness	350 cd/m ²
Static contrast	1000:1
Advanced contrast	80M:1
Response time (GTG)	1ms
Viewing zone	horizontal/vertical: 170°/160°, right/left: 85°/85°, up/down: 80°/80°
Colour support	16.7mIn (sRGB: 99%; NTSC: 72%)
Horizontal Sync	30 - 89kHz
Viewable area W x H	596.7 x 335.7mm, 23.5 x 13.2"
Pixel pitch	0.233mm
Colour	matte

02 INTERFACES / CONNECTORS / CONTROLS

Signal input	DVI x1 HDMI x1 DisplayPort x1
USB HUB	x2
HDCP	yes
Headphone connector	yes

03 FEATURES

Blue light reducer	yes
Flicker free	yes
Adaptive Sync support	DisplayPort: 2560x1440 @75Hz
OSD languages	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL
Control buttons	Power, Menu/ Select, +/- Volume, -/ ECO, Exit, Input
User controls	picture adjust (brightness, contrast, ECO, blue light reducer, ACR, OD), colour adjust (colour temp., user preset, i-Style Colour), OSD (OSD H. position, OSD V. position, OSD time out), language, recall, miscellaneous (sharp and soft, video mode adjust, opening logo, FreeSync, display information), input select, audio settings (volume, mute, audio)
Speakers	2 x 2W
Convenience	Kensington-lock™ prepared, DDC2B, Mac OSX

04 MECHANICAL

Display position adjustments	height, pivot (rotation), swivel, tilt
Height adjustment	130mm
Rotation (PIVOT function)	90°
Swivel stand	90°; 45° left; 45° right
Tilt angle	22° up; 5° down
VESA mounting	100 x 100mm

05 ACCESSORIES INCLUDED

Cables power, USB, HDMI, DP

Other quick start guide, safety guide

06 POWER MANAGEMENT

Power supply unit internal

Power supply AC 100 - 240V, 50/60Hz

Power usage 33W typical, 0.46W stand by, 0.28W off mode

07 SUSTAINABILITY

Regulations CE, TÜV-GS, EAC, RoHS support, ErP, WEEE, REACH

Energy efficiency class (Regulation (EU) 2017/1369) G

REACH SVHC above 0.1%: Lead


08 DIMENSIONS / WEIGHT

Product dimensions W x H x D 613.5 x 412 (542) x 230mm

Box dimensions W x H x D 745 x 455 x 207mm

Weight (without box) 6.6kg

EAN code 4948570115396

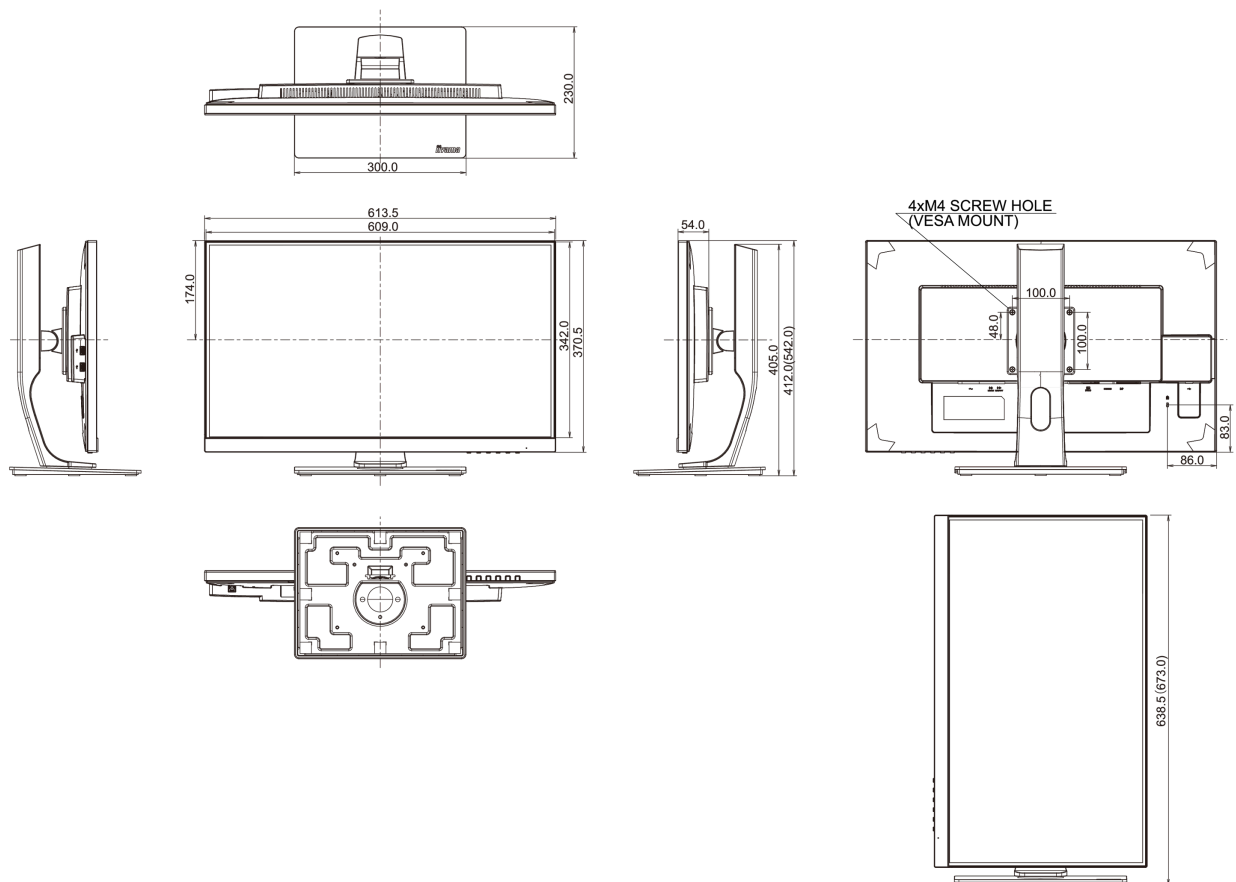

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.