



LAN Kontrola

LAN kontrola omogućava vršenje izmena u OSD meniju ekrana putem Vaše mreže (softver nije uključen).



4K

UHD rezolucija (3840x2160), poznatija kao 4K, nudi gigantsko vidljivo područje sa 4 puta više informacija i radnim prostorom od Full HD ekrana. Zbog visokog DPI-ja (tačke po inču), prikazuje neverovatno oštre i jasne slike.

01 KARAKTERISTIKE EKRANA

Dizajn	Tanki okvir
Dijagonala	65", 164cm
Panel	AMVA3 LED, matte finish, haze 2%
Osnovna rezolucija	3840 x 2160 @60Hz (8.3 megapixel 4K UHD)
Osnovna rezolucija	60Hz
Format ekrana	16:9
Osvetljenje	450 cd/m ²
Statički kontrast	4000:1
Vreme odziva (GTG)	8ms
Zona gledanja	horizontalno/vertikalno: 178°/178°, desno/levo: 89°/89°, gore/dole: 89°/89°
Podržane boje	1.07B 10bit (8bit + Hi-FRC)
Horizontalna sinhronizacija	30 - 83KHz
Vidljiva površina Š x V	1428.48 x 803.52mm, 56.2 x 31.6"
Širina okvira (stranice, vrh, dno)	16mm, 16mm, 21.8mm
Razmak piksela	0.372mm
Boja okvra	crna, sjajna

02 KONEKTORI / KONTROLE

Ulaz analognog signala	Komponentni video x1 (Y/Pb/Pr)
Ulaz digitalnog signala	HDMI x3 (v.2.0) DisplayPort x1
Audio ulaz	Mini konektor x1
Kontrolni ulaz	RS-232c x1 RJ45 (LAN) x1 IR x1
Digitalni izlaz signala	DisplayPort x1 (v.1.2 Daisy Chain)
Audio izlaz	Mini konektor x1 RCA (L/R) x1 Zvučnici 2 x 10W
Monitor kontrolni izlaz	RS-232c x1
HDCP	da
USB portovi	x3 (v.3.0 x1, v.2.0 x2)

03 KARAKTERISTIKE

Dotatno	Scheduler (7 positions), DisplayWall, MediaPlayer, handles
Maksimalno neprekidno radno vreme	24/7
Protiv zadržavanja slike	da
Video zid / daisy chain	yes
Reprodukcija medija	da
Kućište (okvir)	plastika
Senzor osvetljenosti	da
HDR	yes (HDMI)

04 OPŠTE

OSD jezici	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL
------------	----------------------------------------

Kontrolni tasteri	Menu, Source, Plus, Minus, Up, Down, Power
Korisničke kontrole	picture (picture settings (picture mode, backlight, contrast, brightness, saturation, hue, sharpness, color temperature, noise reduction, reset), advanced color settings, base colour adjustment, adaptive contrast, ambient light sensor), Sound (balance, advanced sound settings, audio source), applications (media player, schedule, display wall), settings (language, network settings, control setting, set monitor ID, energy saving settings, aspect, freeze, anti-image retention, OSD rotation, OSD info box, DP 1.2, LED, opening logo, information, reset all)
Plug&Play	DDC2B, Mac OSX

05 MEHANIČKI

Orijentacija	pejzaž, portret
Dizajniran bez ventilatora	da
VESA montiranje	400 x 400mm
Nosač za mini PC	VESA 75 x 75, VESA 100 x 100
Opseg radne temperature	0°C - 40°C
Temperatura skladištenja	- 20°C - 60°C
MTBF - Prosecno vreme izmedju kvarova	50.000 sati (izuzimajući pozadinsko osvetljenje)

06 UKLJUČENI DODACI

Kablovi	Strujni kabl, HDMI (1.8m), DP (1.8m)
Upustva	kratko uputstvo, bezbednosni vodič
Ostalo	Mini-PC bracket, 4x screws
Daljinski upravljač	da (baterije uključene)

07 UPRAVLJANJE NAPAJANJEM


Napajanje	interna
Potrošnja energije	% 1W tipično, 0.5W stand by, 0.5W iskljucen

08 ODRŽIVOST

Propisi	CB, CE, TÜV-Bauart, RoHS podrška, ErP, WEEE, CU, REACH
REACH SVHC	iznad 0.1%: Olova

09 DIMENZIJE / TEŽINA

Dimenzije proizvoda Š x V x D	1462.5 x 843.5 x 70mm
Dimenzije kutije Š x V x D	1640 x 986 x 226mm
Težina (bez kutije)	22.8kg
Težina (sa kutijom)	31.1kg
EAN kod	4948570116270

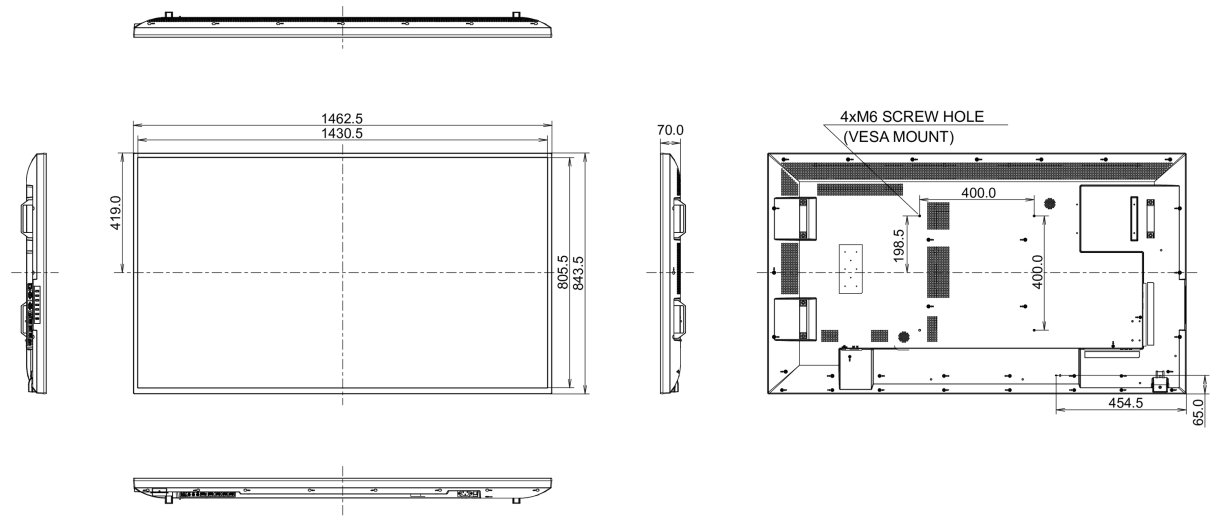

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IYAMA CORPORATION. ALL RIGHTS RESERVED