



### 28" IPS panel with 4K resolution and a height adjustable stand

The XUB2893UHSU is a stylish edge-to-edge design monitor, perfect for multi-monitor set-ups in both office and home-office. The IPS panel offers accurate and consistent colour reproduction with wide viewing angles, while the 4K resolution allows you to display 4 times more information than on a Full HD monitor. Additionally, the ProLite XUB2893UHSU is equipped with digital HDMI and DisplayPort inputs with high contrast and brightness values ensuring the monitor will provide excellent performance for photographic and web design. The height adjustable stand ensures you can easily adjust the screen position to your preferences.



#### IPS Technology

IPS technology offers higher contrast, darker blacks and much better viewing angles than standard TN technology. The screen will look good no matter what angle you look at it.



#### 4K

UHD resolution (3840x2160), better known as 4K, offers a gigantic viewable area with 4 times more information and work space than a Full HD screen. Due to the high DPI (dots per inch), it displays an incredibly sharp and crisp image.

## 01 DISPLAY CHARACTERISTICS

<b>Design</b>	3-side borderless
<b>Diagonal</b>	28", 71cm
<b>Panel</b>	IPS LED, matte finish, haze 25%
<b>Native resolution</b>	3840 x 2160 @60Hz (8.2 megapixel 4K UHD)
<b>Aspect ratio</b>	16:9
<b>Panel brightness</b>	300 cd/m <sup>2</sup>
<b>Static contrast</b>	1000:1
<b>Advanced contrast</b>	80M:1
<b>Response time (GTG)</b>	3ms
<b>Viewing zone</b>	horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89°
<b>Colour support</b>	1.07B 10bit (8bit + Hi-FRC) (sRGB: 100%; NTSC: 85%)
<b>Horizontal Sync</b>	30 - 135kHz
<b>Viewable area W x H</b>	620.93 x 341.28mm, 24.4 x 13.4"
<b>Pixel pitch</b>	0.16mm
<b>Colour</b>	matte, black

## 02 INTERFACES / CONNECTORS / CONTROLS

<b>Signal input</b>	HDMI x1 DisplayPort x1
<b>USB HUB</b>	x4 (v.3.0 x2 (DC5V, 900mA) & v.2.0 x2 (DC5V, 500mA))
<b>HDCP</b>	yes
<b>Headphone connector</b>	yes

## 03 FEATURES

<b>Blue light reducer</b>	yes
<b>Flicker free</b>	yes
<b>Extra</b>	i-style Colour
<b>OSD languages</b>	EN, DE, FR, ES, IT, RU, JP, CZ, NL, PL
<b>Control buttons</b>	Power, Menu, Scroll up/ Volume, Scroll down/ ECO, Exit/ i-Style colour, Input
<b>User controls</b>	picture adjust (brightness, contrast, ECO mode, blue light reducer, ACR, OD, gamma, X-Res Technology), colour settings (colour temperature, user preset, hue, saturation, i-Style colour), OSD (OSD H.position, OSD V.position, OSD rotate, OSD time, after AC cut), language, recall, miscellaneous (sharp and soft, video mode adjust, opening logo, DDC/CI, RGB range, display information), input select, audio settings (volume, mute)
<b>Speakers</b>	2 x 2W
<b>Convenience</b>	Kensington-lock™ prepared, DDC/CI, DDC2B, Mac OSX

## 04 MECHANICAL

<b>Display position adjustments</b>	height, swivel, tilt, pivot (rotation both sides)
<b>Height adjustment</b>	130mm
<b>Rotation (PIVOT function)</b>	90°
<b>Swivel stand</b>	90°; 45° left; 45° right
<b>Tilt angle</b>	23° up; 5° down
<b>VESA mounting</b>	100 x 100mm

## 05 ACCESSORIES INCLUDED

Cables	power, USB, HDMI, DP
Other	quick start guide, safety guide

## 06 POWER MANAGEMENT


Power supply unit	internal
Power supply	AC 100 - 240V, 50/60Hz
Power usage	39.5W typical, 0.5W stand by, 0.5W off mode

## 07 SUSTAINABILITY

Regulations	CE, TÜV-Bauart, EAC, PSE, RoHS support, ErP, WEEE, VCCI, REACH, ENERGY STAR®, UKCA (*This model meets old ENERGY STAR® criteria only)
Energy efficiency class (Regulation (EU) 2017/1369)	F
REACH SVHC	above 0.1%: Lead

## 08 DIMENSIONS / WEIGHT

Product dimensions W x H x D	636.5 x 414 (544) x 230mm
Box dimensions W x H x D	770 x 478 x 228mm
Weight (without box)	7.6kg
Weight (without stand)	4.9kg
Weight (with box)	9.9kg
EAN code	4948570118564

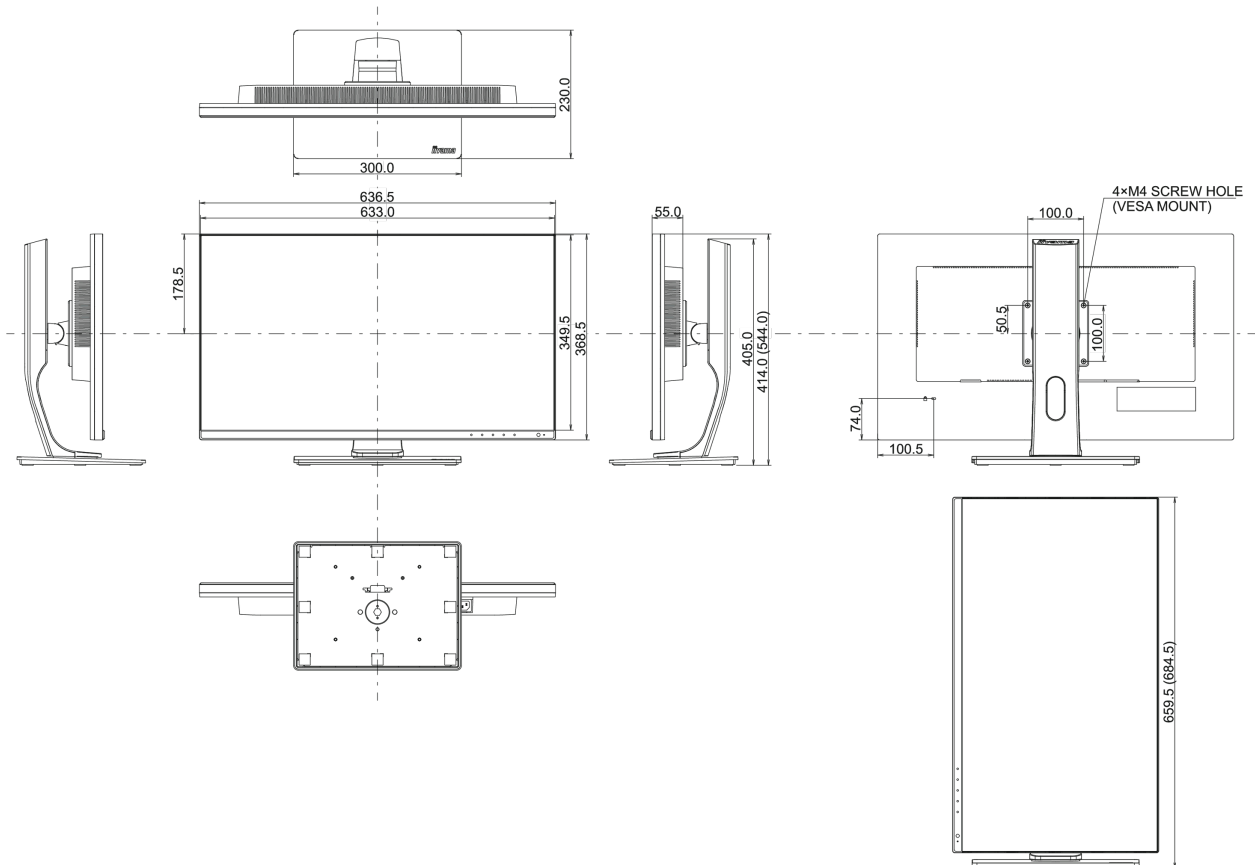

*All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.*

© IYAMA CORPORATION. ALL RIGHTS RESERVED